


MATERIAL: BLACK EPDM RUBBER  
 HARDNESS: 65-75 SHORE A  
 TEMP. RANGE: -40C to +107C (225F) CONTINUOUS  
 +121C(+250F) SHORT TERM  
 EXCELLENT RESISTANCE TO OZONE, UV, AND WEATHER  
 AVERAGE COEFFICIENT OF FRICTION  
 FOR 'ATLASTASEAL' TO CONVEYOR BELT: .38  
 (16 BELT SAMPLES USED)  
 APPROXIMATE WEIGHT: 5 pounds per foot  
 MAXIMUM STRUCTURE THICKNESS = 1/2"

GORDON "ATLASTASEAL"  
 1-800-553-4567 PAT. #4,989,727

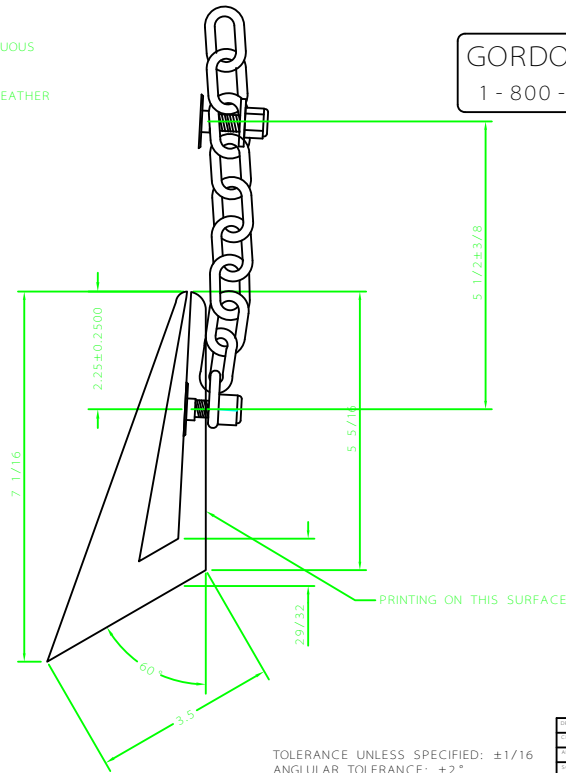

LENGTH: AS REQUIRED

RETAINING CHAIN SPACING:  
 6 INCHES OFF OF BOTH ENDS  
 AND SPACED EVERY 2 FEET  
 BETWEEN.

RETAINING CHAIN COMPONENTS:  
 2) 3/8-16 X 1 1/4 ELEVATOR BOLT  
 (PLAIN FINISH)  
 2) 3/8 FLAT WASHER (ZINC)  
 8) 1/4" PROOF COIL CHAIN (ZINC)

E: CHAINS NOW SPACED 2FT.  
 D: NOTE REGARDING STRUCTURE THICKNESS  
 C: ADDED LENGTH NOTE  
 B: ADDED MORE DIMS  
 A: ADDED BOLT DIM LOCATION

ARCH ENVIRONMENTAL EQUIP., INC.

ATLASTASEAL  
 TECHNICAL INFORMATION  
 PN: GSR-101

DRAWN	DATE				
CHECKED	DATE				
APPROVED	DATE				
SCALE	DWG. NO.	DRAWING NO.	SHEET	OF	REV.

TOLERANCE UNLESS SPECIFIED: ±1/16  
 ANGULAR TOLERANCE: ±2°